

Sloane


An Intricate elegant design, going back in time. The Sloane cast iron radiator design was first produced in America in the 1880's. It is famous for its finely etched features which gives rise to its name of the curly eared princess.

The elaborate yet sophisticated design of the Sloane provides a contemporary look for the more modern setting as well as a traditional look for the period home.

HEIGHT (Please select your required height to view heat output and specifications)

450 **750**

CODE/ SECTIONS	LENGTH	OUTPUT				WEIGHT (KG)	WATER CONTENT (LTRs)
		Dt60		Dt50			
		BTUs	WATTS	BTUs	WATTS		
SLO-750-03	264	1152	338	909	266	28	5.10
SLO-750-04	340	1536	450	1212	355	37	6.80
SLO-750-05	417	1919	563	1515	444	47	8.50
SLO-750-06	494	2303	675	1818	533	56	10.20
SLO-750-07	570	2687	788	2121	622	66	11.90
SLO-750-08	647	3071	900	2424	710	75	13.60
SLO-750-09	723	3455	1013	2727	799	84	15.30
SLO-750-10	800	3839	1125	3030	888	94	17.00
SLO-750-11	877	4223	1238	3333	977	103	18.70
SLO-750-12	953	4607	1350	3636	1066	112	20.40
SLO-750-13	1030	4990	1463	3939	1154	122	22.10
SLO-750-14	1106	5374	1575	4242	1243	131	23.80
SLO-750-15	1183	5758	1688	4545	1332	140	25.50
SLO-750-16	1260	6142	1800	4848	1421	150	27.20
SLO-750-17	1336	6526	1913	5151	1510	159	28.90
SLO-750-18	1413	6910	2025	5454	1598	169	30.60
SLO-750-19	1489	7294	2138	5757	1687	178	32.30
SLO-750-20	1566	7678	2250	6060	1776	187	34.00
SLO-750-21	1643	8062	2363	6363	1865	197	35.70
SLO-750-22	1719	8445	2475	6666	1954	206	37.40
SLO-750-23	1796	8829	2588	6969	2042	215	39.10
SLO-750-24	1872	9213	2700	7272	2131	225	40.80
SLO-750-25	1949	9597	2813	7575	2220	234	42.50
SLO-750-26	2026	9981	2925	7878	2309	243	44.20
SLO-750-27	2102	10365	3038	8181	2398	253	45.90
SLO-750-28	2179	10749	3150	8484	2486	262	47.60
SLO-750-29	2255	11133	3263	8787	2575	271	49.30
SLO-750-30	2332	11516	3375	9090	2664	281	51.00
SLO-750-31	2409	11900	3488	9393	2753	290	52.70
SLO-750-32	2485	12284	3600	9696	2842	300	54.40
SLO-750-33	2562	12668	3713	9999	2930	309	56.10
SLO-750-34	2638	13052	3825	10302	3019	318	57.80
SLO-750-35	2715	13436	3938	10604	3108	328	59.50
SLO-750-36	2792	13820	4050	10907	3197	337	61.20
SLO-750-37	2868	14204	4163	11210	3286	346	62.90
SLO-750-38	2945	14588	4275	11513	3374	356	64.60
SLO-750-39	3021	14971	4388	11816	3463	365	66.30
SLO-750-40	3098	15355	4500	12119	3552	374	68.00

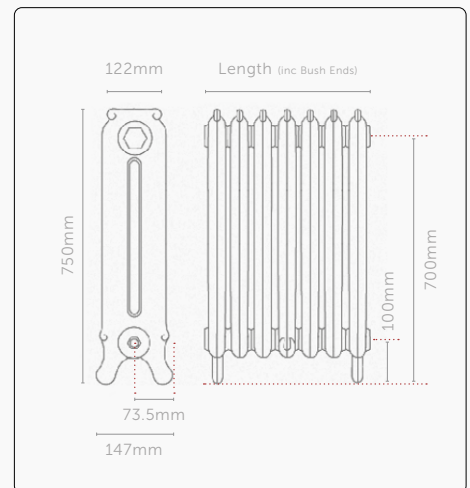

01205 280354

sales@paladinradiators.com

www.paladinradiators.com

Paladin Radiators, Langrick Road,
New York, Lincolnshire LN4 4XH



Maximum test pressure = 3.3 bar | Maximum working pressure = 2.5 bar

Dt50 figures shown in accordance with BS EN442. We have, from experience, found that the Dt60 figures usually give adequate output without oversizing the radiators on standard heating systems. Maximum test pressure = 3.3 bar | Maximum working pressure = 2.5 bar. Lengths quoted are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline. Longer lengths are available on request.