



Tools & Material Re	quired
---------------------	--------

Allen key - 12mm Spanner - 29mm Adjustable Spanner

Key	Component	Qty
Α	Manual Body (flow)	1
В	Manual Body (return)	1
С	Nut	2
D	Valve Tail (1/2" BSP)	2
E	Compression Fitting (15mm)	2
F	Balancing Cap	1
G	Cover - Short (32mm length)	2
Н	Cover - Long (46mm length)*	2
	* chrome set only	

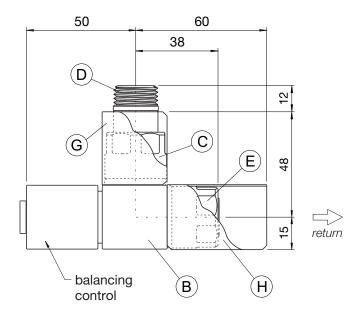

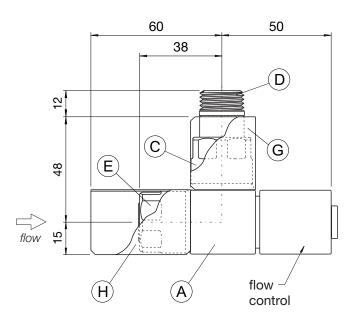

## **Assembly Instructions**

Fit valve tails (D) to radiator using 12mm Allen key, ensuring nut (C) is in place.

Note: over-tightening of valve tails may cause damage to surface finish of radiator connections. Do not use grips.

Loosen compression fittings (E) and apply valve bodies (A) & (B) to 15mm pipe tails.

Install radiator onto bracket mountings and tighten valve tails (D) onto valve bodies (A) & (B).

Tighten compression fittings (E).

After filling and venting radiator, remove balancing cap (F) and adjust balancing control to balance radiator.

Concept House

Watchmoor Point

Camberley Surrey GU15 3AD

Finally, fit short and long covers (G & H).



